

Covers for roads, parking and service stations



- Secure
- Anti-slip
- Lockable
- Light Weight
- Non-Corrodible
- No rattling noise in traffic
- Suitable for installation in public roads

B125



Model	SLB2318	SLB2323(C)	SLB3131	SLB2346 DF	SLB3163 DF
Clearance (mm)	600 x 450	600 x 600	800 x 800	600 x 1.200	800 x 1.600
Weight cover (kg)	10	12	21	2 x 12	2 x 21

* B125 covers are standard provided with an aluminum frame

* B125 covers are also available as vented cover

* SLB2323 is available with a composite frame



B125 covers are available in a double frame with removable beam.
On demand multiple frames are available to cover bigger areas.

C250




Model	SLC3600(DC)	SLC4200(DC)
Clearance (mm)	Ø 900	Ø 1.060
Weight cover (kg)	31	40
Glass fiber skirt	SKI 0036	SKI 0042
Concrete slab (with anti-slip profile)	CONSLAB 36	CONSLAB 42
Dimensions concrete slab (mm)	1450 x 1450 x 200	1600 x 1600 x 200

C250 covers are standard provided with a gasket and could be provided with a central dip hole.

For roads, parking and service stations

D400

Model	SLD2424	SLD2723L	SLD2300L	SLD3000L	SLD3600L
Clearance (mm)	610 x 610	700 x 600	Ø 600	Ø 760	Ø 900
Weight cover (kg)	29	31	28	36	46

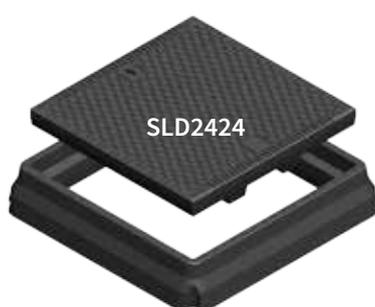

Except for the SLD2424 cover, can all D400 covers be provided with a stainless steel lock and/or a sealing gasket.



Standard colour: black.
Other colours and company logos/inscriptions optional (subject to quantities).

Optional gasket to ensure that the covers are water-, air- and gastight. Eliminates eventual odour propagation.

Stainless steel lock to prevent theft and unauthorised opening (standard on D400 covers).

Certified covers EN124: B125 - C250 - D400



Unique Characteristics

Material

- Advanced fiber glass composite

Noiseless in traffic

- The material and unique form of the frame prevents the cover from rocking eliminating all rattling noises typical with cast iron covers.

Light weight

- 3 x lighter than steel covers
- 4 x lighter than concrete covers
- Single person removal; preventing risks of physical injury

Secure

- Cover material has no intrinsic value
- Lockable for preventing theft
- Eliminates risks of public injuries
- Self extinguishing when fire source is removed
- Non-conductive for temperature and electricity

Anti-slip

- Significantly more grip vs. iron, steel & other composite covers as well on dry as on wet road surface

Durable

- Low wear characteristics
- Lockable, preventing theft and/or tampering
- Longer life expectancy vs. steel, iron & other composite covers
- 15-year warranty on tread pattern

Low maintenance

- Self-cleaning watertight seal
- Easy, single person removal

Non-corrosive

- Sand and salt resistant
- 15-year warranty against corrosion



CGH Belgium nv
Rijksweg 10 C
B- 2880 BORNEM
Tel.: +32 (0)3 459 80 76
E-mail: info@cghbelgium.com

www.cghbelgium.com

MwayPro General Brochure - EN- 20150706
Non-contractual document