

# Aboveground LPG tanks



## Safety:

Aboveground LPG tanks from CGH fulfill safety requirements of propane and butane storage. We hold all necessary certificates to manufacture such tanks issued by Notified Body.

## Outer surface:

Abrasive grit-blasted to grade Sa 2,5 according to EN-ISO 8501-1 and painted in C3M standard or higher.

LPG tanks are made of carbon steel and are equipped with access manholes and covers with fittings. Connections and flanges used are provided by well-known qualified producers.

## Technical data:

- Production according to PED/2014/68/UE directive, using AD 2000 or EN 13445 standards
- Pressure: 15,6 bar – standard; 17,6 bar on request
- Working temperature: -20/+40°C
- Other conditions on request

Nominal volume*	Dimensions		Weight
	diameter	length	
[m <sup>3</sup> ]	[mm]	[mm]	[kg]
6,4	1 250	5 650	1 450
9	1 250	7 650	1 800
9,9	1 600	5 350	2 350
15	1 600	7 850	3 150
9,9	2 000	3 550	2 400
14,5	2 000	5 050	3 050
20	2 000	7 050	4 000
25	2 000	8 550	4 650
30	2 000	10 050	5 400
42,5	2 500	9 300	7 400
52	2 500	11 300	8 750
62	2 500	13 300	10 250
71	2 500	15 300	11 650
61,5	2 900	10 000	10 900
71,5	2 900	11 500	12 350
84,5	2 900	13 500	14 300
97,5	2 900	15 500	16 200
110	2 900	17 500	18 050
120	2 900	19 000	19 500
125	2 900	19 500	19 950
138	2 900	21 500	22 000
150	2 900	23 500	23 800
75	3 200	10 750	17 600
150	3 200	19 750	27 700
200	3 200	26 750	37 800

## CE Certificate

\*In-between sizes are possible.






**Project Hungary:** 30 m<sup>3</sup>, Ø 2000 mm



**Project Nigeria:** 45 m<sup>3</sup>, Ø 2500 mm



**Project Portugal:** 100 m<sup>3</sup>, Ø 2900 mm

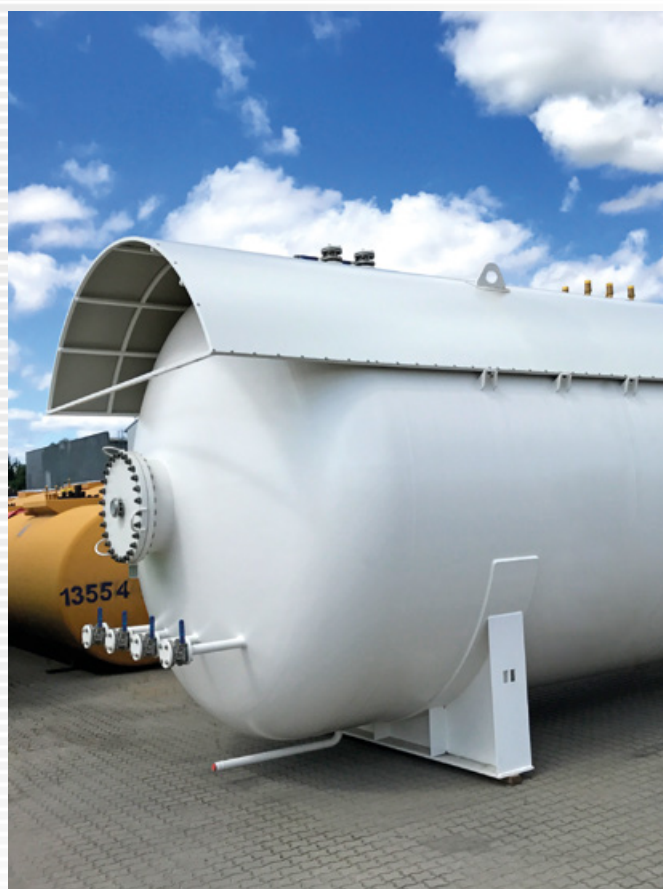

**Project Ghana:** 75 m<sup>3</sup>, Ø 3400 mm

